


1X-RRZZHHTTS4-BR8

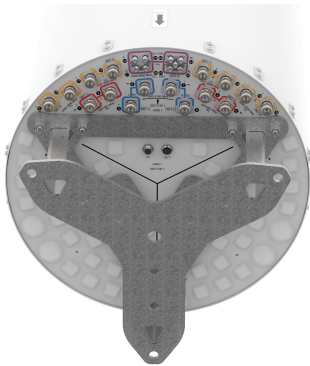

24-port sector antenna, 4x 694-960, 4x 1427-2690, 4x 1695-2180, 4x 2490-2690MHz 65° HPBW and 8x 3300-3800 MHz, 90° HPBW, 24x RET

- Separated Extension KIT available for this antenna, check Optional Mounting Kits section

General Specifications

Band	Multiband
Calibration Connector Interface	M-LOC
Calibration Connector Quantity	1
Performance Note	Outdoor usage
RF Connector Interface	4.3-10 Female M-LOC
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	12
RF Connector Quantity, low band	4
RF Connector Quantity, total	24

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface, quantity	1 female 1 male
Internal RET	High band (1) Low band (2) Mid band (5)
Protocol	3GPP/AISG 2.0

Dimensions

Length	2100 mm 82.677 in
Net Weight, antenna only	77.6 kg 171.079 lb
Outer Diameter	580 mm 22.835 in

Array Layout


1X-RRZZHHTTS4-BR8

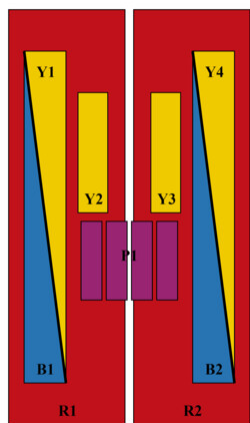

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	RET UID
R1	694-960	1 - 2	1	AISG1	CPxxxxxxxxxxxxR1
R2	694-960	3 - 4	2	AISG1	CPxxxxxxxxxxxxR2
B1	1695-2180	5 - 6	3	AISG1	CPxxxxxxxxxxxxB1
B2	1695-2180	7 - 8	4	AISG1	CPxxxxxxxxxxxxB2
Y1	2490-2690	9 - 10	5	AISG1	CPxxxxxxxxxxxxY1
Y4	2490-2690	15 - 16			
Y2	1427-2690	11 - 12	6	AISG1	CPxxxxxxxxxxxxY2
Y3	1427-2690	13 - 14	7	AISG1	CPxxxxxxxxxxxxY3
P1	3300-3800	17 - 24	8	AISG1	CPxxxxxxxxxxxxP1

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

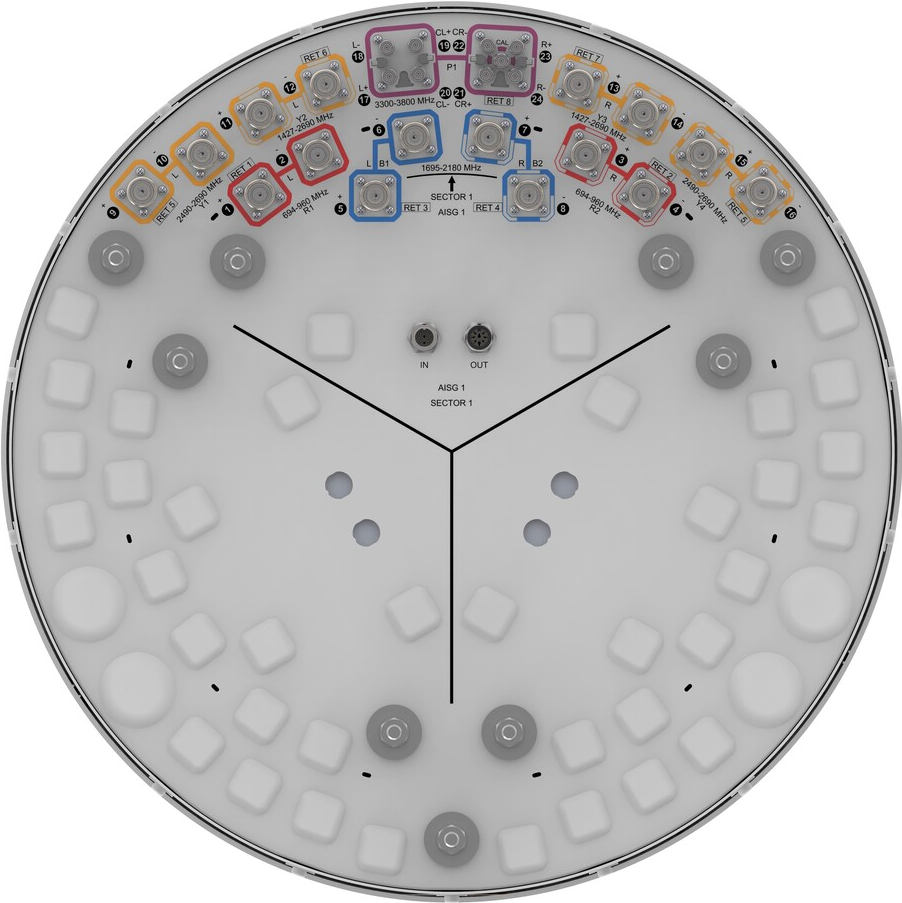

1X-RRZZHHTTS4-BR8

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2180 MHz 2490 – 2690 MHz 3300 – 3800 MHz 694 – 960 MHz
Polarization	±45°

Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y2,Y3	Y2,Y3	Y2,Y3	Y2,Y3	Y2,Y3	B1,B2	B1,B2
Frequency Band, MHz	694–806	790–896	890–960	1427–1518	1695–1990	1920–2300	2300–2500	2490–2690	1695–1990	1920–2180
RF Port	1-4	1-4	1-4	11-14	11-14	11-14	11-14	11-14	5-8	5-8
Gain at Mid Tilt, dBi	13.9	14.6	14.7	13.1	15.1	16.3	16.8	17	16.7	17
Beamwidth, Horizontal, degrees	67	59	57	61	67	59	60	57	72	69
Beamwidth, Vertical, degrees	10.4	9.5	9.1	10	8.1	7.2	6.4	5.9	5.5	5
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	18	17	15	16	18	19	20	18	17	17
CPR at Boresight, dB	19	18	19	15	21	19	19	19	18	20
Isolation, Cross Polarization, dB	27	27	27	25	25	25	25	25	27	27
Isolation, Inter-band, dB	27	27	27	25	25	25	25	25	26	26
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, typical, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153	-153	-153	-153	-153
Input Power	250	250	250	200	200	200	150	150	200	200

1X-RRZZHHTTS4-BR8

per Port at
50°C,
maximum,
watts

Electrical Specifications

	Y1,Y4	P1	P1
Frequency Band, MHz	2490–2690	3300–3600	3600–3800
RF Port	9-10,15-16	17-24	17-24
Gain at Mid Tilt, dBi	17.8	15.1	15.4
Beamwidth, Horizontal, degrees	63	84	81
Beamwidth, Vertical, degrees	4	6.5	6
Beam Tilt, degrees	2–12	2–12	2–12
USLS (First Lobe), dB	17	14	15
Coupling level, Amp, Antenna port to Cal port, dB		26	26
Coupling level, max Amp Δ, Antenna port to Cal port, dB		±2	±2
Coupler, max Amp Δ, Antenna port to Cal port, dB		0.9	0.9
Coupler, max Phase Δ, Antenna port to Cal port, degrees		7	7
CPR at	20	16	15

1X-RRZZHHTTS4-BR8

Boresight, dB			
Isolation, Cross Polarization, dB	27	25	25
Isolation, Inter-band, dB	27	25	25
Isolation, Co- polarization, dB		19	19
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, typical, 2 x 20 W, dBc	-153	-140	-140
Input Power per Port at 50°C, maximum, watts	150	75	75

Electrical Specifications, Broadcast 65°

Frequency Band, MHz	3300–36003600–3800	
Gain, dBi	16.4	16.4
Beamwidth, Horizontal, degrees	65	65
Beamwidth, Horizontal at 10 dB, degrees	117	112
Beamwidth, Vertical, degrees	6.5	6.1
Front-to- Back Total Power at 180° ± 30°, dB	33	33

1X-RRZZHHTTS4-BR8

USLS (First Lobe), dB	18	18
Electrical Specifications, Service Beam		
Frequency Band, MHz	3300–3600	3600–3800
Steered 0° Gain, dBi	19.8	20.7
Steered 0° Beamwidth, Horizontal, degrees	28	24
Steered 0° Front-to-Back Total Power at 180° ± 30°, dB	36	
Steered 0° Horizontal Sidelobe, dB	14	14
Steered 30° Gain, dBi	19.3	19.3
Steered 30° Beamwidth, Horizontal, degrees	29	29
Steered 30° Front-to-Back Total Power at 180° ± 30°, dB	36	35
Steered 30° Horizontal Sidelobe, dB	9	10

Electrical Specifications, Soft Split

Frequency Band, MHz	3300–3600	3600–3800
Gain, dBi	19.3	19.2
Beamwidth, Horizontal, degrees	31	33

1X-RRZZHHTTS4-BR8

Front-to-Back Total Power at 180° ± 30°, dB	35	35
Horizontal Sidelobe, dB	16	19

Mechanical Specifications

Wind Loading @ Velocity, frontal	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	745.0 N @ 150 km/h (167.5 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	750 mm 29.528 in
Depth, packed	690 mm 27.165 in
Length, packed	2510 mm 98.819 in
Weight, gross	99.3 kg 218.919 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---