

NN-33C-HG-R1B



4-port Next Generation PerforMax™ sector antenna, 4x 698–896 MHz, 33° HPBW, 1x RET

- Superior patterns for enhanced interference mitigation resulting in improved SINR, higher throughput, and more capacity
- Antenna optimized for higher gain with superior radiation efficiency
- Best in class PIM immunity
- Internal SBT allows remote RET control from the radio over the RF jumper cable
- Powered by Andrew's SEED® technology (Sustainable Energy Efficient Design)
- Interleaved dipole technology results into an attractive, low wind load mechanical package

General Specifications

Antenna Type	Sector with internal RET and bias tee
Band	Single band
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, low band	4
RF Connector Quantity, total	4


Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (1)
Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W

NN-33C-HG-R1B

Protocol	3GPP/AISG 2.0
Dimensions	
Width	970 mm 38.189 in
Depth	235 mm 9.252 in
Length	2438 mm 95.984 in
Net Weight, antenna only	75 kg 165.347 lb

Array Layout

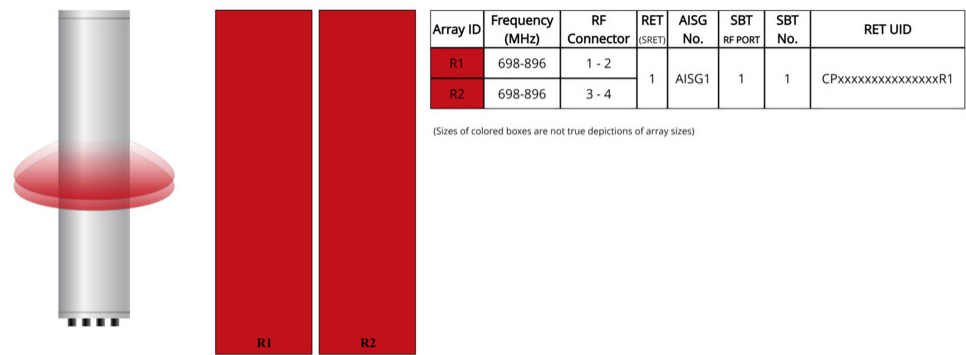

Port Configuration



NN-33C-HG-R1B

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	600 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2
Frequency Band, MHz	698–806	806–896
RF Port	1-4	1-4
Gain, dBi	18.2	18.8
Beamwidth, Horizontal, degrees	35	32
Beamwidth, Vertical, degrees	9.1	8.2
Beam Tilt, degrees	0–10	0–10
USLS (First Lobe), dB	16	15
Front-to-Back Ratio at 180°, dB	29	33
CPR at Boresight, dB	25	27
Isolation, Cross Polarization, dB	25	25
Isolation, Inter-band, dB	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300

Mechanical Specifications

Wind Loading @ Velocity, frontal	3,022.0 N @ 150 km/h (679.4 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	922.0 N @ 150 km/h (207.3 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	3,022.0 N @ 150 km/h (679.4 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	1122 mm 44.173 in
Depth, packed	575 mm 22.638 in
Length, packed	2689 mm 105.866 in
Weight, gross	117.2 kg 258.381 lb

NN-33C-HG-R1B

Regulatory Compliance/Certifications

Agency	Classification
UK-ROHS	Compliant

Included Products

BSAMNT-8	–	Wide Profile Antenna Down tilt Mounting Kit for 3.0 - 4.5 in (75 - 115mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---

BSAMNT-8



Wide Profile Antenna Down tilt Mounting Kit for 3.0 - 4.5 in (75 - 115mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor
Color Silver

Dimensions

Compatible Diameter, maximum 114.3 mm | 4.5 in
Compatible Diameter, minimum 61 mm | 2.402 in
Weight, net 6 kg | 13.228 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware
Packaging quantity 1
Weight, gross 6.2 kg | 13.669 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

BSAMNT-8

