

DFJ-2S123V

HELIAX® Discrete, 2 single mode fiber, 5 mm LSZH cable, armored
furcation, End 1: DLC. End 2: DLC



Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Wireless Fiber Cable Assemblies
Product Brand	HELIAX®
Product Series	DFJ
Ordering Note	ANDREW® non-standard product

General Specifications


Construction Type	Discrete fiber tail
Interface, Connector A	DLC
Interface Feature, connector A	Clippable
Interface, Connector B	DLC
Interface Feature, connector B	Clippable
Jacket Color	Black
Total Fibers, quantity	2

Dimensions

Breakout Length, connector A	457.2 mm 18 in
Breakout Length, connector B	457.2 mm 18 in
Cable Assembly Length Range (m)	1 – 40
Diameter Over Jacket	4.8 mm 0.189 in

Ordering Tree

DFJ-2S103F-10M

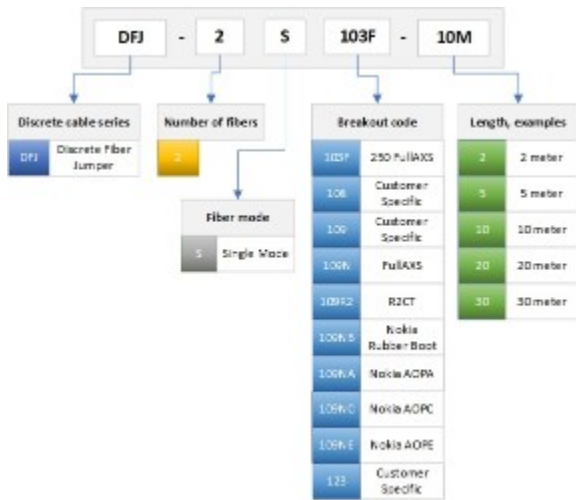

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.B3
Insertion Loss, typical note	Insertion loss is measured at 1310 and 1550 nm
Insertion Loss, typical	0.5 dB

Environmental Specifications

Operating Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Environmental Space	Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Cable weight	25 kg/km 16.799 lb/kft
---------------------	--------------------------

* Footnotes

Insertion Loss, typical note	Insertion loss is measured at a room temp of +20°C (+68°F)
-------------------------------------	--