MPT-F2B-BB-NN-500M



HELIAX® Power cable, with aluminum shield with quantity 2x10 mm2 cores, flame resistant CPR Class B2ca s1, d2, a1 rated, 500 meters

- Available with different colors on demand

Product Classification

Regional Availability	Europe
Product Type	Power cable
Product Brand	HELIAX®
Ordering Note	ANDREW® non-standard product
Warranty	For more information, please consult our Product Warranty guidelines

General Specifications

Application	Remote radio head
Cable Type	Power
Conductor Type, singles	Stranded
Conductors, quantity	2
Jacket Color	Black
Jacket Color, singles	Blue | White


Dimensions

Cable Length	500.024 m | 1,640.5 ft
Diameter Over Jacket	11.379 mm | 0.448 in
Conductor Gauge	10 mm² class 5

Cross Section Drawing

©2026 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: November 5, 2026


MPT-F2B-BB-NN-500M

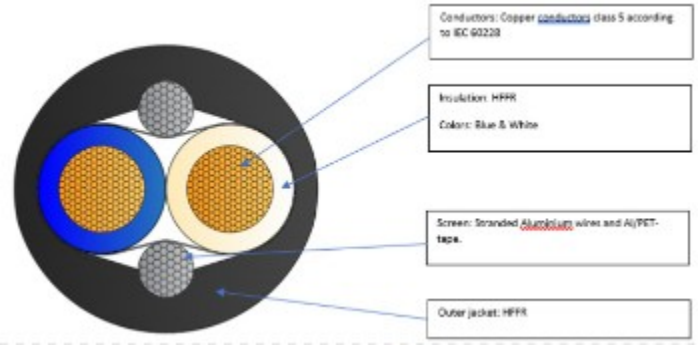

Electrical Specifications

Safety Voltage Rating	600 V

Ordering Tree

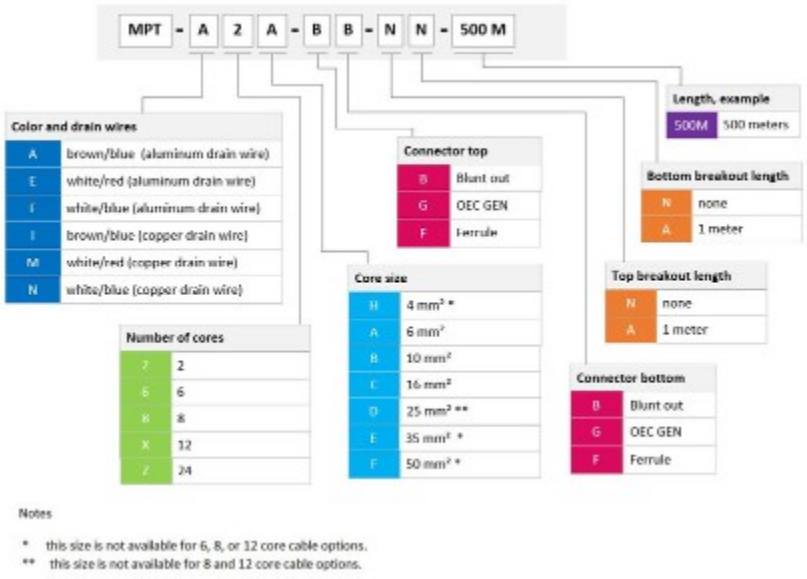

Notes

* this size is not available for 6, 8, or 12 core cable options.
** this size is not available for 8 and 12 core cable options.

Material Specifications

Ground Wire Material	Annealed aluminum wires
Insulation Material, singles	Flame retardant PE
Jacket Material	Flame retardant PE
Outer Shield (Braid) Coverage	100 %
Outer Shield (Tape) Material	Aluminum/Poly, non-bonded

©2026 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: November 5, 2026

MPT-F2B-BB-NN-500M

Environmental Specifications

Installation temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Operating Temperature	-40 °C to +90 °C (-40 °F to +194 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
EN50575 CPR Cable EuroClass Fire Performance	B2ca
EN50575 CPR Cable EuroClass Smoke Rating	s1
EN50575 CPR Cable EuroClass Droplets Rating	d2
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Indoor/Outdoor
Jacket UV Resistance	UV stabilized

Packaging and Weights

Cable weight	258.012 kg/km | 173.376 lb/kft

* Footnotes

Warranty	For more information, please consult our Product Warranty guidelines
Operating Temperature	Specification applicable to non-terminated bulk fiber cable

©2026 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.
Revised: November 5, 2026