## F4-DMDM-1M5-SGWB-D



D-CLASS HELIAX® 1/2" SureFlex® Jumper with interface types 7-16 DIN Male and 7-16 DIN Male with HELIAX® SureGuard weatherproofing and Birdproofing, 1.5 m

• If there are threads along the entire device port length, the HELIAX® SureGuard weatherproofing solutions will only seal properly if the HSG-M29-ADPT adapter is installed on the device port

#### **Product Classification**

Product Type SureFlex® D-CLASS, dynamic PIM

Product Brand HELIAX® | SureFlex®

Product Series RSJ4-50

### General Specifications

Body Style, Connector AStraightBody Style, Connector BStraight

Interface, Connector A7-16 DIN MaleInterface, Connector B7-16 DIN Male

Specification Sheet Revision Level A

#### Dimensions


**Length** 1.5 m | 4.921 ft

Nominal Size 1/2 in

### Logo Image



# F4-DMDM-1M5-SGWB-D

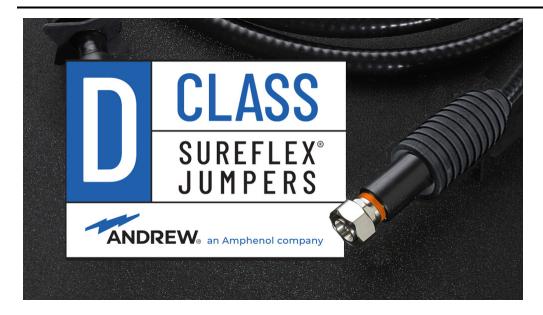

### **Electrical Specifications**

**3rd Order IMD Dynamic** -116 dBm

**3rd Order IMD Dynamic Test Method** Two +43 dBm carriers per IEC 62037

DTF, Connector A -34 dB
DTF, Connector B -34 dB

#### VSWR/Return Loss

Frequency Band	VSWR	Return Loss (dB)
698-960 MHz	1.065	30.04
1700-2200 MHz	1.065	30.04
2200-2700 MHz	1.106	25.96
3400-3800 MHz	1.222	20.01

## Jumper Assembly Sample Label



## F4-DMDM-1M5-SGWB-D



### **Environmental Specifications**

**Immersion Test Method**Meets IEC 60529:2001, IP68 in mated condition

Weatherproofing Method HELIAX® SureGuard weatherproofing boot

Packaging and Weights

**Included** Weatherproofing boot

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

