

SAHARA2



DryLine® Dehydrator, Low-pressure membrane, 2.0–5.0 psig, with summary alarm, 240 Vac, 50/60 Hz

OBSOLETE
This product was discontinued on: May 1, 2018

Product Classification

Product Type	Dehydrator
Product Brand	DryLine®

General Specifications

Alarm Type	Summary
Circuit Breaker Requirement	Electrical connections require separate circuits for dehydrator installation
Cut In Pressure	14 kPa 2.031 psig
Cut In/Out Pressure Type	Factory set
Cut Out Pressure	34 kPa 4.931 psig
Dehydrator Type	Automatic Membrane
Dew Point	Better than -45 °C (-50 °F) at 95% RH at +40 °C (+104 °F)
Excess-Run Alarm	10 minutes, factory set
Flow Rate, nominal	56.3 SLPM
Low-Pressure Alarm	68 mbar 7 kPa 1 psig
Mounting	Floor
Port Count	1
Port Type	3/8 in PE tube
Power Cord	Europe power cord with stripped leads USA power cord


Dimensions

SAHARA2

Product Height	266.7 mm 10.5 in
Product Width	431.8 mm 17 in
Product Depth	381 mm 15 in
Volume Capacity, maximum	31.149 m³ 1100 ft³
Volume Capacity, minimum	2.832 m³ 100.001 ft³

SAHARA2

Outline Drawing–Front

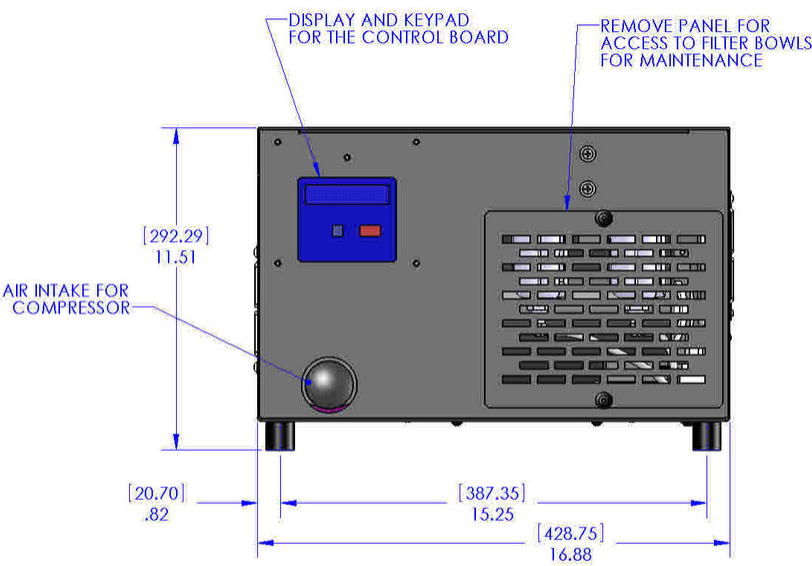


SAHARA FRONT VIEW

- 1. THIS UNIT IS DESIGNED TO SET ON A COUNTER OR THE FLOOR DUE TO ITS WEIGHT.
- 2. MAKE SURE TO LEAVE PLENTY OF ROOM AROUND THE UNIT FOR AIRFLOW AND COOLING.
- 3. DIMENSIONS ARE AS FOLLOWS: [] MILLIMETERS, INCHES

SAHARA2


Outline Drawing–Side

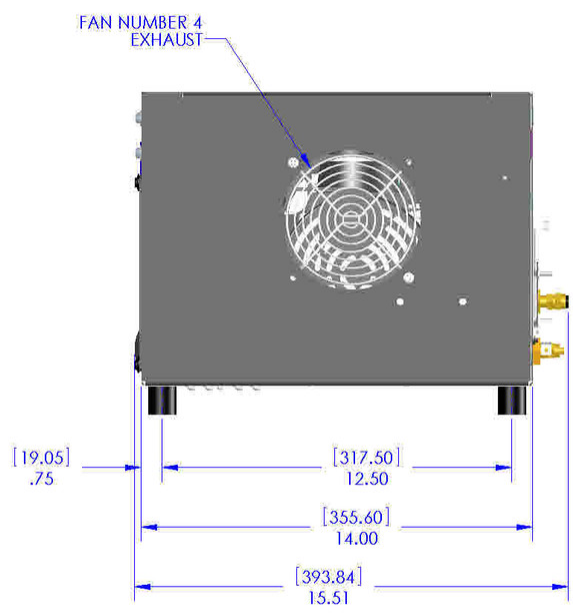

SAHARA SIDE VIEW

SAHARA2


Outline Drawing–Back

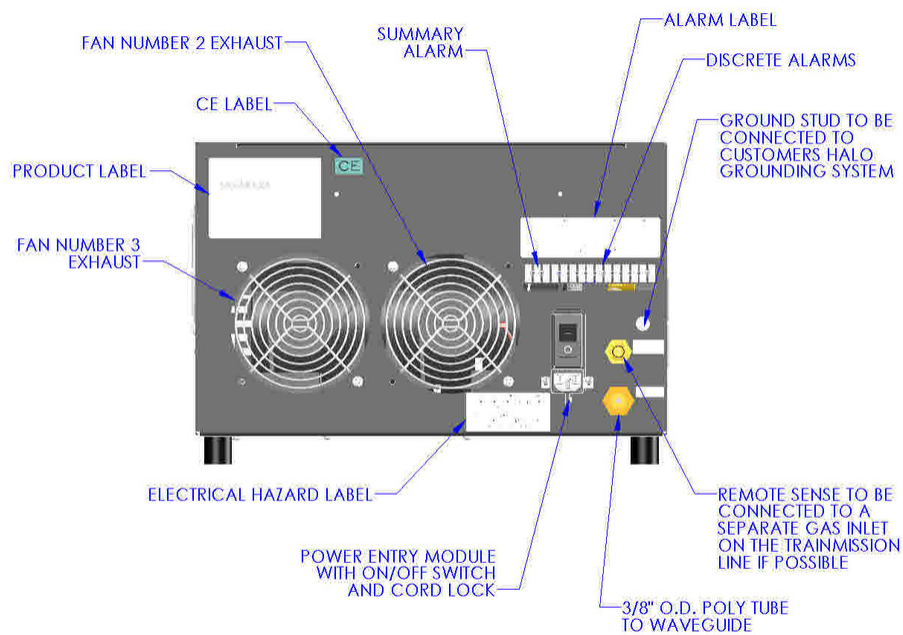

SAHARA BACK VIEW

SAHARA2

Outline Drawing–Top

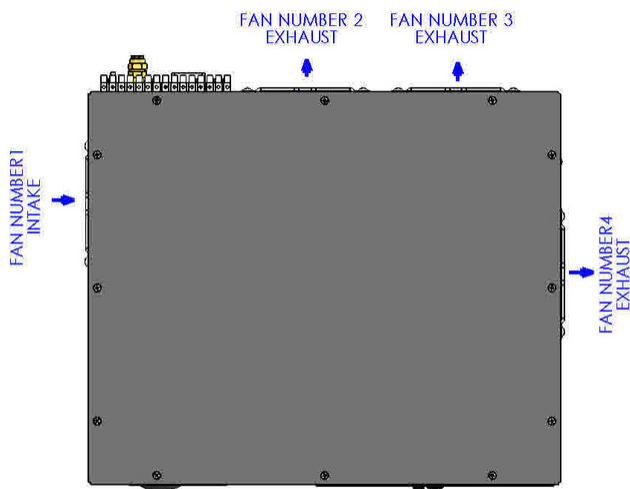

SAHARA TOP VIEW

Electrical Specifications

Alarm Contact Rating	Form C dry contacts, 2 amps at 30 Vdc
Power Consumption, average	925 W
Power Frequency	60/50 Hz
Power Phase	Single
Suggested Circuit Breaker Size	30 A
Voltage	240 Vac ±10%
Voltage Type	ac

Environmental Specifications

Operating Temperature	-10 °C to +40 °C (+14 °F to +104 °F)
-----------------------	--------------------------------------

Packaging and Weights

Included	3/8 in polyethylene tubing 90° elbow fitting Ball valve Male connector fitting PTFE tape Power cord Power cord connector lock Screws
Weight, net	25 kg 55.115 lb

SAHARA2

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

