



## Tower Mounted Amplifier, Dual 700 MHz with AISG 2.0

- TMA is operating in AISG & CWA mode, Alarm Current consumption CWA mode 190 mA
- Designed to boost UP-Link Coverage and KPIs
- RET interface to control antenna RET actuators with AISG standard
- Single AISG with 1 RET connector
- Automatic LNA by-pass function
- Built in lightning protection
- Connectors "in line"
- 2 input ports and 2 output ports

### OBSOLETE

This product was discontinued on: December 31, 2024

#### Replaced By:

E14R00P46

Tower Mounted Amplifier, Dual 700 MHz with AISG 2.0, with 4.3-10 connectors

## Product Classification

**Product Type** 1-BTS:1-ANT (Uniplex) | Tower mounted amplifier


## General Specifications

<b>Color</b>	Gray
<b>Modularity</b>	2-Twin
<b>Mounting</b>	Pole   Wall
<b>Mounting Pipe Hardware</b>	Band clamps (2)
<b>RF Connector Interface</b>	7-16 DIN Female

## Dimensions

<b>Height</b>	144 mm   5.669 in
<b>Width</b>	230 mm   9.055 in
<b>Depth</b>	320 mm   12.598 in
<b>Ground Screw Diameter</b>	8 mm   0.315 in
<b>Mounting Pipe Diameter Range</b>	40–160 mm

## Outline Drawing

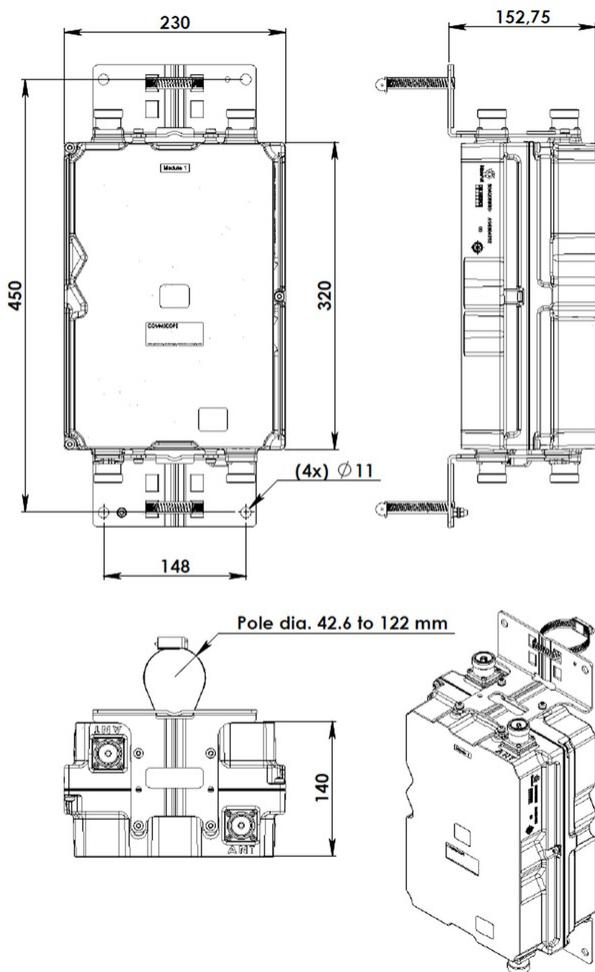

## Electrical Specifications

**License Band, LNA**

APT 700 | DCS 1800

## Electrical Specifications, dc Power/Alarm

**dc Switching/Redundancy**

Yes

**Lightning Surge Current**

10 kA

**Lightning Surge Current Waveform**

8/20 waveform

**Operating Current at Voltage**

110 mA @ 12 V

**Operating Current Tolerance**

±20 mA

**Voltage, CWA Mode**

7–18 Vdc

**Alarm Current, CWA Mode**

190 mA ±10 mA

## Electrical Specifications, AISG

<b>AISG Connector</b>	8-pin DIN Female
<b>AISG Connector Standard</b>	IEC 60130-9
<b>Protocol</b>	AISG 2.0
<b>Voltage, AISG Mode</b>	7–30 Vdc

## Electrical Specifications

<b>Sub-module</b>	<b>1   2</b>
<b>Branch</b>	1
<b>Port Designation</b>	ANT
<b>License Band</b>	APT 700, LNA
<b>Return Loss, typical, dB</b>	20
<b>Return Loss - Bypass Mode, typical, dB</b>	18

## Electrical Specifications Rx (Uplink)


<b>Frequency Range, MHz</b>	<b>703–748</b>
<b>Bandwidth, MHz</b>	45
<b>Gain, nominal, dB</b>	13
<b>Gain Tolerance, dB</b>	±1
<b>Noise Figure, maximum, dB</b>	2
<b>Noise Figure, typical, dB</b>	1.2
<b>Group Delay Variation, maximum, ns</b>	100
<b>Group Delay Variation</b>	5
<b>Bandwidth, MHz</b>	
<b>Total Group Delay, maximum, ns</b>	150
<b>Return Loss, minimum, dB</b>	18
<b>Insertion Loss - Bypass Mode, typical, dB</b>	1.3

## Electrical Specifications Tx (Downlink)

<b>Frequency Range, MHz</b>	<b>758–803</b>
<b>Bandwidth, MHz</b>	45
<b>Insertion Loss, maximum, dB</b>	0.5
<b>Insertion Loss, typical, dB</b>	0.4

<b>Group Delay Variation, maximum, ns</b>	30
<b>Group Delay Variation Bandwidth, MHz</b>	5
<b>Return Loss, minimum, dB</b>	18
<b>Return Loss, typical, dB</b>	20
<b>Input Power, RMS, maximum, W</b>	200
<b>Input Power, PEP, maximum, W</b>	2500
<b>3rd Order PIM, typical, dBc</b>	-153
<b>3rd Order PIM Test Method</b>	Two +43 dBm carriers

## Block Diagram

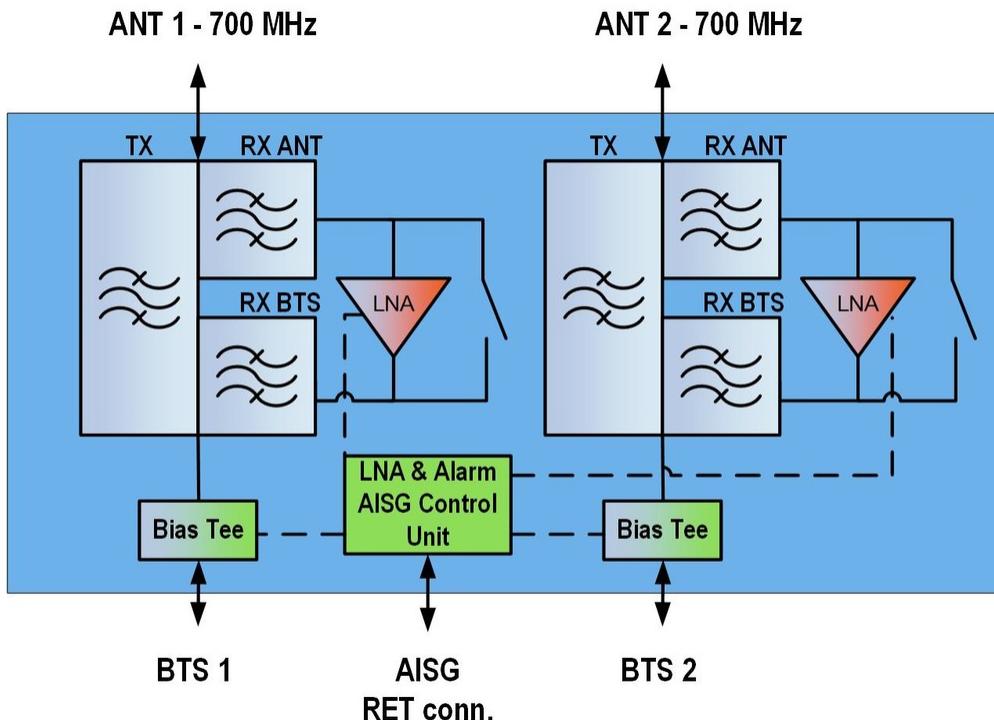

## Material Specifications

<b>Finish</b>	Painted
---------------	---------

## Environmental Specifications

<b>Operating Temperature</b>	-40 °C to +65 °C (-40 °F to +149 °F)
------------------------------	--------------------------------------

# E15R02P27

---

<b>Relative Humidity</b>	Up to 100%
<b>Corrosion Test Method</b>	IEC 60068-2-11, 30 days
<b>Ingress Protection Test Method</b>	IEC 60529:2001, IP67

## Packaging and Weights

<b>Included</b>	Mounting hardware
<b>Volume</b>	10 L
<b>Weight, net</b>	12 kg   26.455 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

<b>License Band, LNA</b>	License Bands that have RxUplink amplification
--------------------------	--