

# FFV4S4-65B-R7-V2



20-port sector antenna, 4x 617-894, 8x 1695-2690 MHz 65° HPBW and 8x 3100-4000 MHz, Beamformer, 7x RET

- All Internal RET actuators are connected in "Cascaded SRET" configuration
- Cluster connectors for the beam-forming array, including eight RF ports plus one calibration port
- Beamforming array for 3100-4000 MHz, n77 and n78

## General Specifications

|                                  |  |
|----------------------------------|--|
| Antenna Type                     | Sector and beamforming   |
| Band                             | Multiband  |
| Calibration Connector Interface  | M-LOC  |
| Calibration Connector Quantity   | 1  |
| Grounding Type                   | RF connector inner conductor and body grounded to reflector and mounting bracket |
| Performance Note                 | Outdoor usage  |
| RF Connector Interface           | 4.3-10 Female   M-LOC  |
| RF Connector Location            | Bottom   |
| RF Connector Quantity, high band | 8  |
| RF Connector Quantity, mid band  | 8  |
| RF Connector Quantity, low band  | 4  |
| RF Connector Quantity, total     | 20   |

## Remote Electrical Tilt (RET) Information


|  |   |
|--|---|
| RET Hardware                             | CommRET v2                                  |
| RET Interface                            | 8-pin DIN Female   8-pin DIN Male           |
| RET Interface, quantity                  | 1 female   1 male                           |
| Input Voltage                            | 10–30 Vdc                                   |
| Internal RET                             | High band (1)   Low band (2)   Mid band (4) |
| Power Consumption, active state, maximum | 8 W   |
| Power Consumption, idle state, maximum   | 1 W   |
| Protocol                                 | 3GPP/AISG 2.0 (Single RET)                  |

## Dimensions

# FFV4S4-65B-R7-V2

|                          |                    |
|--------------------------|--------------------|
| Width                    | 498 mm   19.606 in |
| Depth                    | 197 mm   7.756 in  |
| Length                   | 2000 mm   78.74 in |
| Net Weight, antenna only | 38 kg   83.776 lb  |
| TDD Column Spacing       | 41 mm   1.614 in   |

## Array Layout

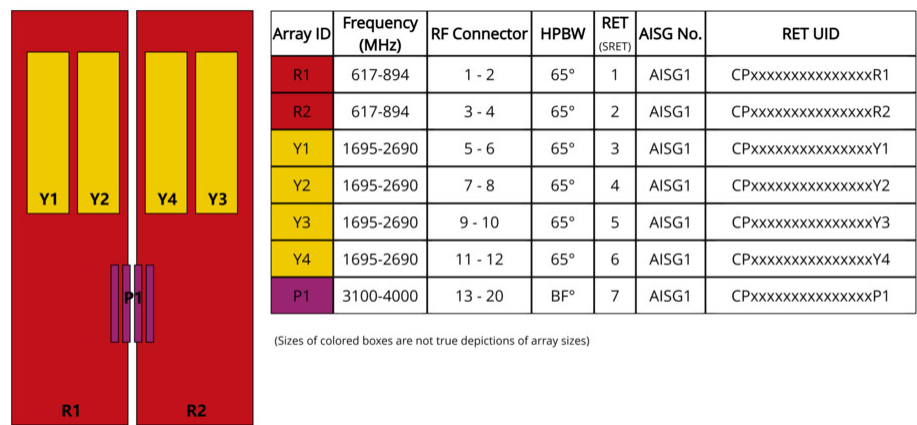

## Port Configuration



# FFV4S4-65B-R7-V2

## Electrical Specifications

|                            |   |
|----------------------------|---|
| Impedance                  | 50 ohm  |
| Operating Frequency Band   | 1695 – 2690 MHz   3100 – 4000 MHz   617 – 894 MHz |
| Polarization               | ±45°  |
| Total Input Power, maximum | 1,400 W @ 50 °C                                   |

## Electrical Specifications

|                                   | R1,R2      | R1,R2      | Y1,Y3      | Y1,Y3      | Y1,Y3      | Y1,Y3      | Y2,Y4      | Y2,Y4      | Y2,Y4      | Y2,Y4      |
|-----------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Frequency Band, MHz               | 617–698    | 698–894    | 1695–1880  | 1850–1990  | 1920–2200  | 2490–2690  | 1695–1880  | 1850–1990  | 1920–2200  | 2490–2690  |
| RF Port                           | 1,2,3,4    | 1,2,3,4    | 5,6,9,10   | 5,6,9,10   | 5,6,9,10   | 5,6,9,10   | 7,8,11,12  | 7,8,11,12  | 7,8,11,12  | 7,8,11,12  |
| Gain, dBi                         | 13.8       | 14.8       | 15.9       | 16.3       | 16.5       | 17         | 15.8       | 16.1       | 16.5       | 16.7       |
| Beamwidth, Horizontal, degrees    | 68         | 59         | 72         | 72         | 70         | 56         | 63         | 64         | 60         | 59         |
| Beamwidth, Vertical, degrees      | 13.8       | 11.7       | 7.7        | 7.3        | 6.9        | 5.7        | 8.1        | 7.7        | 7.3        | 6.1        |
| Beam Tilt, degrees                | 2–14       | 2–14       | 2–12       | 2–12       | 2–12       | 2–12       | 2–12       | 2–12       | 2–12       | 2–12       |
| USLS (First Lobe), dB             | 17         | 16         | 17         | 19         | 18         | 19         | 16         | 18         | 17         | 18         |
| Front-to-Back Ratio at 180°, dB   | 28         | 29         | 33         | 32         | 31         | 26         | 34         | 37         | 37         | 30         |
| Isolation, Cross Polarization, dB | 25         | 25         | 25         | 25         | 25         | 25         | 25         | 25         | 25         | 25         |
| Isolation, Inter-band, dB         | 25         | 25         | 25         | 25         | 25         | 25         | 25         | 25         | 25         | 25         |
| VSWR   Return loss, dB            | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc     | -150       | -150       | -150       | -150       | -150       | -150       | -150       | -150       | -150       | -150       |
| Input Power per Port at           | 250        | 250        | 200        | 200        | 200        | 200        | 200        | 200        | 200        | 200        |

# FFV4S4-65B-R7-V2

50°C,  
maximum,  
watts

## Electrical Specifications

|   | P1        | P1        | P1        |
|---|-----------|-----------|-----------|
| Frequency Band, MHz                                     | 3100–3300 | 3300–3800 | 3700–4000 |
| RF Port   | 13-20     | 13-20     | 13-20     |
| Gain, dBi   | 15.7      | 15.8      | 16.1      |
| Beamwidth, Horizontal, degrees                          | 82        | 88        | 82        |
| Beamwidth, Vertical, degrees                            | 6.7       | 6.2       | 5.8       |
| Beam Tilt, degrees                                      | 0–10      | 0–10      | 0–10      |
| USLS (First Lobe), dB                                   | 11        | 14        | 14        |
| Front-to-Back Ratio at 180°, dB                         | 30        | 31        | 30        |
| Coupling level, Amp, Antenna port to Cal port, dB       | 26        | 26        | 26        |
| Coupling level, max Amp Δ, Antenna port to Cal port, dB | ±2        | ±2        | ±2        |
| Coupler, max Amp Δ, Antenna port to Cal port, dB        | 0.9       | 0.9       | 0.9       |
| Coupler, max Phase Δ, Antenna port to Cal port, degrees | 7         | 7         | 7         |

# FFV4S4-65B-R7-V2

|  |            |            |            |
|--|------------|------------|------------|
| Isolation, Cross Polarization, dB            | 21         | 25         | 25         |
| Isolation, Inter-band, dB                    | 25         | 25         | 25         |
| Isolation, Co-polarization, dB               | 19         | 19         | 19         |
| VSWR   Return loss, dB                       | 1.5   14.0 | 1.5   14.0 | 1.5   14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc                | -140       | -140       | -140       |
| Input Power per Port at 50°C, maximum, watts | 75         | 75         | 75         |

## Electrical Specifications, Broadcast 65°

|   |           |           |           |
|---|-----------|-----------|-----------|
| Frequency Band, MHz                         | 3100–3300 | 3300–3800 | 3700–4000 |
| Gain, dBi                                   | 17.1      | 17.5      | 18        |
| Beamwidth, Horizontal, degrees              | 65        | 65        | 65        |
| Beamwidth, Vertical, degrees                | 6.8       | 6.3       | 5.9       |
| Front-to-Back Total Power at 180° ± 30°, dB | 26        | 27        | 27        |
| USLS (First Lobe), dB                       | 17        | 18        | 19        |

## Electrical Specifications, Service Beam

|                     |           |           |           |
|---------------------|-----------|-----------|-----------|
| Frequency Band, MHz | 3100–3300 | 3300–3800 | 3700–4000 |
| Steered 0°          | 20.3      | 20.5      | 20.7      |

# FFV4S4-65B-R7-V2

|   |      |      |      |
|---|------|------|------|
| Gain, dBi                                   |      |      |      |
| Steered 0°                                  | 26   | 25   | 25   |
| Beamwidth, Horizontal, degrees              |      |      |      |
| Steered 0°                                  | 30   | 30   | 30   |
| Front-to-Back Total Power at 180° ± 30°, dB |      |      |      |
| Steered 0°                                  | 14   | 14   | 14   |
| Horizontal Sidelobe, dB                     |      |      |      |
| Steered 30°                                 | 18.5 | 19.6 | 20.2 |
| Gain, dBi                                   |      |      |      |
| Steered 30°                                 | 32   | 28   | 25   |
| Beamwidth, Horizontal, degrees              |      |      |      |
| Steered 30°                                 | 27   | 29   | 28   |
| Front-to-Back Total Power at 180° ± 30°, dB |      |      |      |

## Electrical Specifications, Soft Split

|   |           |           |           |
|---|-----------|-----------|-----------|
| Frequency Band, MHz                         | 3100–3300 | 3300–3800 | 3700–4000 |
| Gain, dBi                                   | 18.6      | 19.5      | 19.9      |
| Beamwidth, Horizontal, degrees              | 35        | 32        | 29        |
| Front-to-Back Total Power at 180° ± 30°, dB | 27        | 29        | 29        |
| Horizontal Sidelobe, dB                     | 13        | 21        | 20        |

## Mechanical Specifications

Wind Loading @ Velocity, frontal 688.0 N @ 150 km/h (154.7 lbf @ 150 km/h)

# FFV4S4-65B-R7-V2

|                                  |   |
|----------------------------------|---|
| Wind Loading @ Velocity, lateral | 210.0 N @ 150 km/h (47.2 lbf @ 150 km/h)  |
| Wind Loading @ Velocity, maximum | 826.0 N @ 150 km/h (185.7 lbf @ 150 km/h) |
| Wind Loading @ Velocity, rear    | 474.0 N @ 150 km/h (106.6 lbf @ 150 km/h) |
| Wind Speed, maximum              | 241 km/h (150 mph)                        |

## Packaging and Weights

|                |                      |
|----------------|----------------------|
| Width, packed  | 565 mm   22.244 in   |
| Depth, packed  | 309 mm   12.165 in   |
| Length, packed | 2187 mm   86.102 in  |
| Weight, gross  | 51.8 kg   114.199 lb |

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| UK-ROHS       | Compliant  |

## Included Products

|          |   |  |
|----------|---|--|
| BSAMNT-4 | – | Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set. |
|----------|---|--|

## \* Footnotes

|                  |   |
|------------------|---|
| Performance Note | Severe environmental conditions may degrade optimum performance |
|------------------|---|

# BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.5 kg | 14.33 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |

